



High Frequency PWM Sinewave Inverter

COTEK 3000 Watt


The **COTEK 3000** is a PWM High Frequency Sinewave Inverter of the most advanced line of mobile AC power systems available. It provides instant clean AC power anywhere and at anytime as long as a battery is at hand. DC power from sources such as car, truck, boat, standby battery or solar modules is converted into pure sinusoidal 230 Vac / 50Hz mains power. State of the art technology ensures high reliability and excellent performance. The COTEK 3000 can be supplied with a remote panel, including ON/OFF switch and LED display (optional).

Features:

Microprocessor based design, accurate and stable frequency, very low harmonic distortion, rugged, compact and lightweight, high efficiency, quiet running, capable of driving highly reactive loads such as electronic tools and appliances. Other features include high current start up capability, protection against short circuit, reverse polarity, over load, under/over DC input voltage, and automatic load sensing, which is especially important for solar applications.

Typical Applications:

Lighting, power tools with speed control, general electrical tools, laboratory equipment, electronic instruments, medical equipment, emergency power equipment, computers, laser printers, TV sets, radios, satellite receivers, fans, small water pumps, etc.

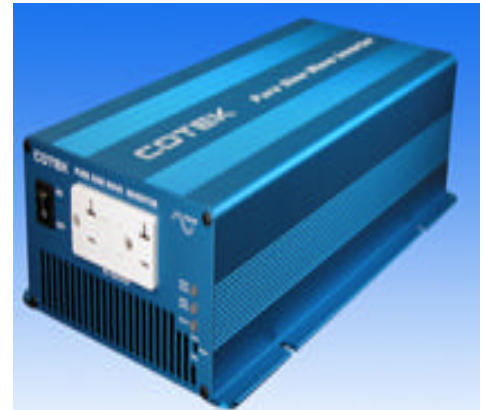

TECHNICAL SPECIFICATIONS

MODEL	S3000-112	S3000-124	S3000-148	APLS-CTK-3000-12	APLS-CTK-3000-24	APLS-CTK-3000-48
Continuous Output Power	3000W	3000W	3000W	3000W	3000W	3000W
Max. Output Power (3 min)	3450W	3450W	3450W	3450W	3450W	3450W
Surge Rating	6000W	6000W	6000W	6000W	6000W	6000W
Input Voltage	12V	24V	48V	12V	24V	48V
Output Voltage	110 / 115 / 120 ± 3%			220 / 230 / 240 ± 3%		
Frequency (selectable)	50 / 60 Hz +/- 0.05%			50 / 60 Hz +/- 0.05%		
Efficiency (full load)	88%	91%	92%	90%	93%	94%
No Load Current	2.0A	1.6A	0.8	2.8A	1.5A	0.7A
Stand-by Current	0.55A	0.35A	0.19A	0.55A	0.35A	0.19A
Output Waveform	Pure Sinewave < 3% THD					
Output Voltage Regulation	100 / 110 / 120V +/-3%			220 / 230 / 240V +/-3%		
Input Voltage Range	10.5 - 5Vdc	21 - 30Vdc	42 - 60Vdc	10.5 - 15Vdc	21 - 30Vdc	42 - 60Vdc
Protection	Overload, Short Circuit, Reverse Polarity (Fuse), Over / Under Input Voltage, Over Temperature					
Input Level Indication	LED: Red / Orange / Green					
Load Level Indication	LED: Red					
Remote Control	CR-6 / CR-7 / CR-8 (optional)					
Operating Temp. Range	0 - 40 °C					
Storage Temp. Range	- 30 °C to 70 °C					
Cooling	Cooling Fan (thermostatically controlled, 65 Deg. C. ON, 45 Deg. C. OFF)					
Compliance (EMC)	FCC Class A			EN55022:1997, EN55024:1997, EN61000-3-2:1998, EN61000-3-3:1995,		e-Mark
Safety	UL 458			EN60950-1		
Dimensions	L = 452 x W = 208 x H = 166 mm					
Weight	9.8 kg					

The manufacturer reserves the right to change specifications without prior notice.